

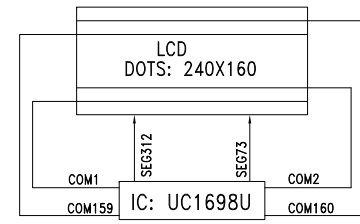
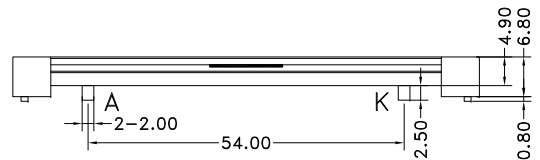
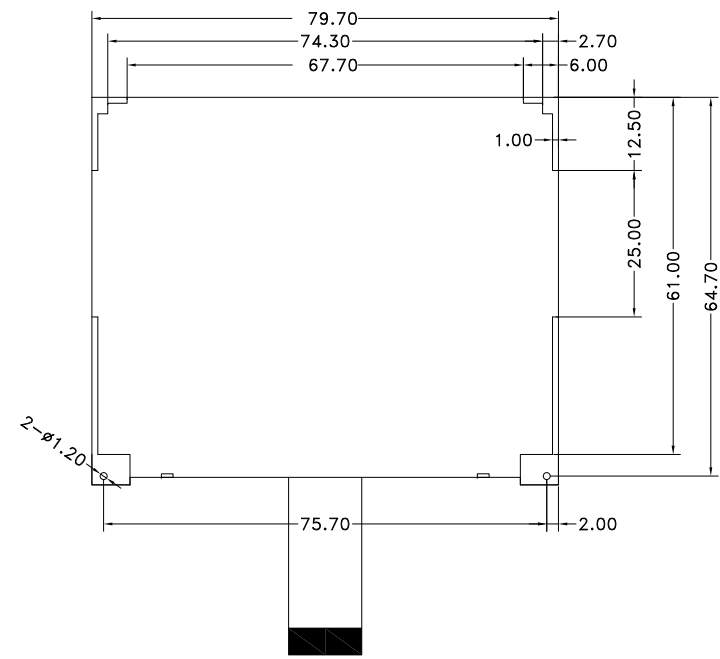
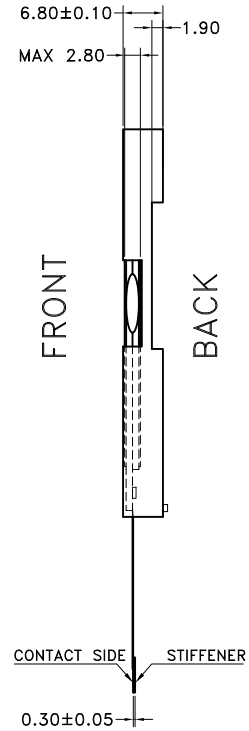


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	2018-04-09
V2.0	Change to STN-Blue	Mike	2018-04-11
V3.0	Add serial number	Mike	2018-04-25

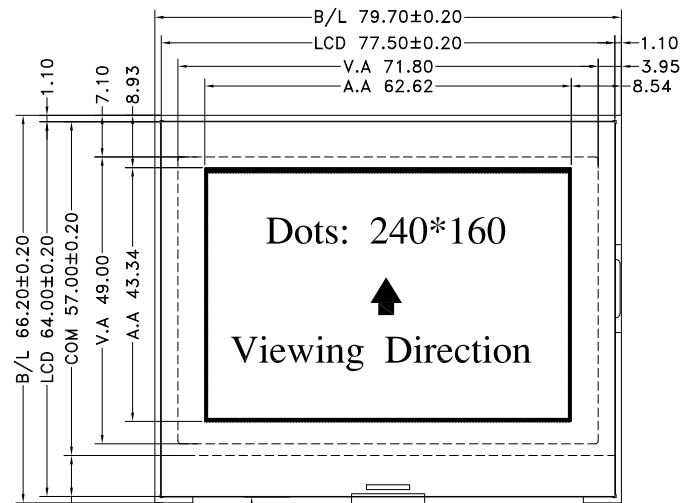

PIN	SYMBOL
1	VLCD
2	VS+
3	VS-
4	VB0-
5	VB1-
6	VB1+
7	VB0+
8	VDD
9	VSS
10	NC(TST4)
11	BM0
12	CS0
13	CD
14	WR1
15	WR0
16	RST
17	D0
18	D1
19	D2
20	D3
21	D4
22	D5
23	D6
24	D7

NOTES :

- LCD TYPE: STN-Blue, Negative Transmissive
- OPERATING VOLTAGE: VDD=3.0V, Vop=16.5V
- VIEWING DIRECTION: 6 O'CLOCK
- DRIVE METHOD: 1/160 Duty, 1/12 Bias
- OPERATING TEMP: -20°C TO +70°C
- STORAGE TEMP: -30°C TO +80°C
- CONNECTOR TAPE: COG+FPC+BL
- DRIVER IC: UC1698U or Equivalent
- BACKLIGHT: 4 pcs White LED, VF=3.1±0.2V, IF=15x4mA
- ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		MODEL NUMBER : SDGG240160-03	VERSION: 3.0
APPROVALS	DATE	UNITS: MM	
DWN	SD-06	GENERAL TOL: ± 0.2	
CHK		DO NOT SCALE THIS DRAWING.	
APP	SD-11	SCALE: 1:1	
		www.sindadisplay.com	