



REV:	DESCRIPTION	BY	DATE
V1.0	New Issue	Mike	2014-08-16

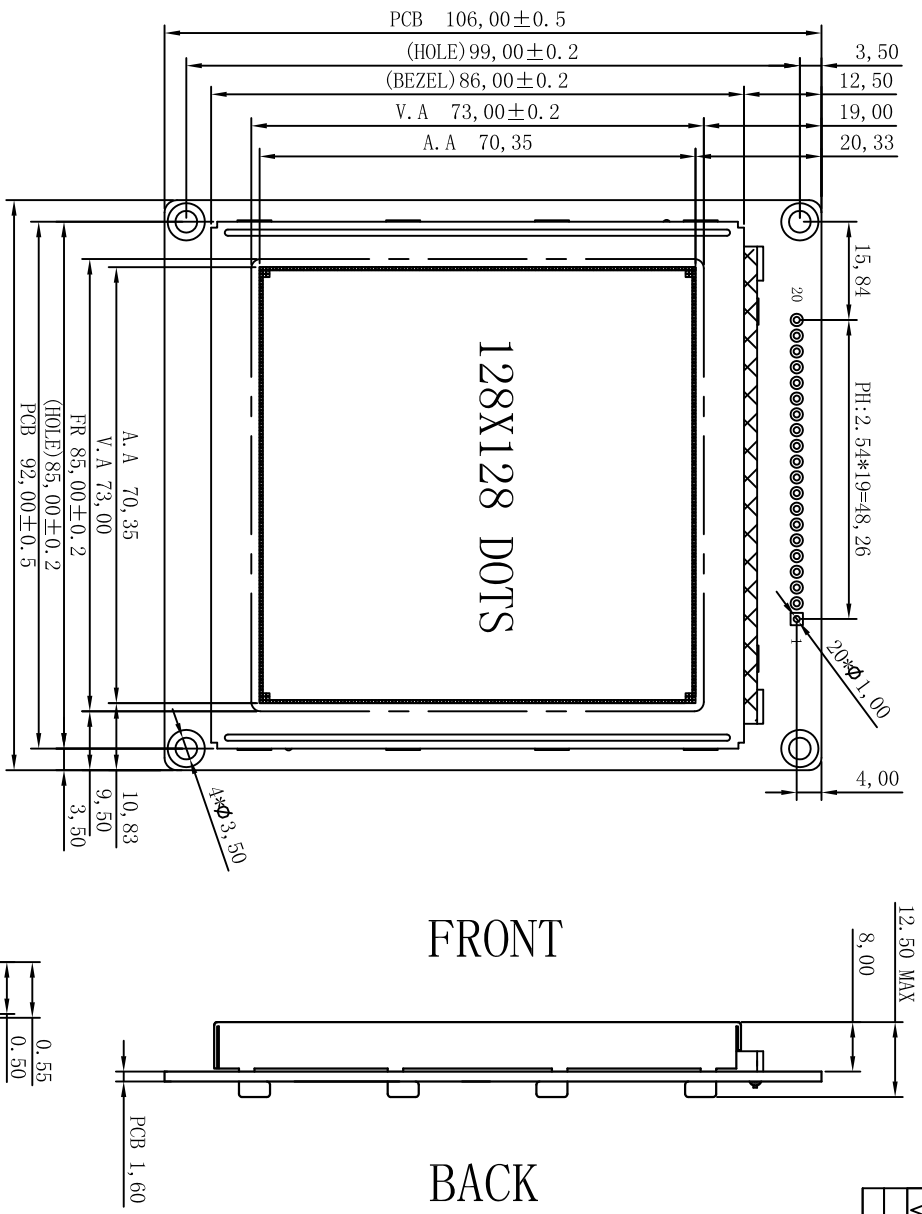

NOTES :

- LCD TYPE: STN-Blue, Negative Transmissive
- OPERATING VOLTAGE: VDD=5.0V, Vop=18.5V
- VIEWING DIRECTION: 6 O'CLOCK
- DRIVE METHOD: 1/128 Duty, 1/12 Bias
- OPERATING TEMP: -20°C TO +70°C
- STORAGE TEMP: -30°C TO +80°C
- CONNECTOR TAPE: Zebra
- DRIVER IC: SAPI024 or Equivalent
- BACKLIGHT: White
- ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

NO	Symbol
1	FG
2	VSS
3	VDD(5.0V)
4	VEE
5	/WR
6	/RD
7	/CE
8	C/D
9	/RST
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	FS
19	LEDA(5.0)
20	LEDC



SINDA DISPLAY TECHNOLOGY CO., LTD.

SHEET: 1 of 1		MODEL NUMBER : SDGB128128-01		VERSION: 1.0		UNITS: MM	
APPROVALS	DATE	GENERAL TOL: ± 0.2	DO NOT SCALE THIS DRAWING.		SCALE: 1:1		
DWN	Mike	www.sindadisplay.com					
CHK							
APP	CJ						