



REV.	DESCRIPTION	BY	DATE
V1.0	New issue	SD-06	2015-04-25

D C B A

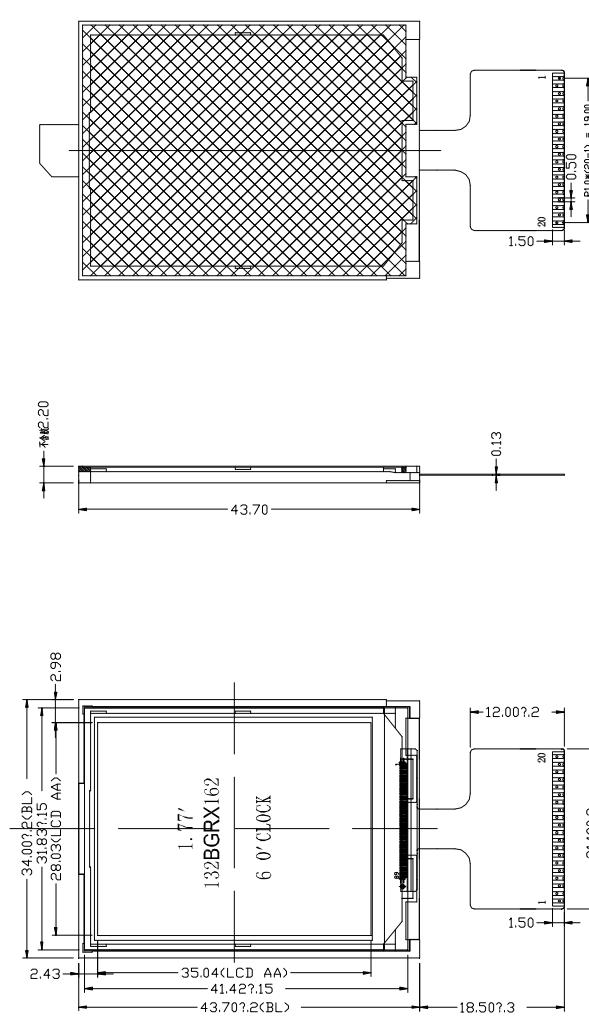

PIN	DESCRIPTION
1	LEDK
2	LEDA
3	GND
4	VCC
5	NC
6	NC
7	CS
8	RESET
9	RS
10	WR
11	RD
12	DB7
13	DB6
14	DB5
15	DB4
16	DB3
17	DB2
18	DB1
19	DB0
20	GND

**SINDA** SINDA DISPLAY TECHNOLOGY CO., LTD.

SHEET: 1 of 1

MODEL NUMBER : SDT01801-A20

VERSION: 1.0

GENERAL TOL: ± 0.2

DO NOT SCALE THIS DRAWING.

UNITS: MM

APPROVALS

DWN	SD-06	DATE	2015-04-25
CHK		DATE	
APP		DATE	

www.sindisplay.com

SCALE: 1:1

D C B A

8 7 6 5 4 3 2 1

- NOTES
1. Drive IC: ST7735S OR COMPATIBLE
  4. Display Type: TFT/Transmissive
  4. Viewing Direction: 6 O' CLOCK
  5. Backlight: 2 Chip White LED
  6. Operating Temperature: -20° C to 70° C
  - Storage Temperature: -30° C to 80° C
  7. General Tolerance: ±0.2