

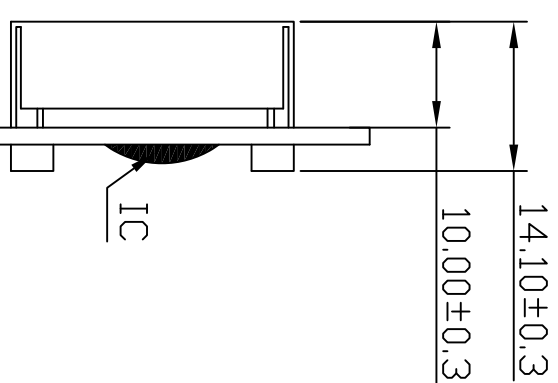


REV:	DESCRIPTION	BY	DATE
V1.0	New Issue	Mike	2013-07-10

PCB 84.00±0.5

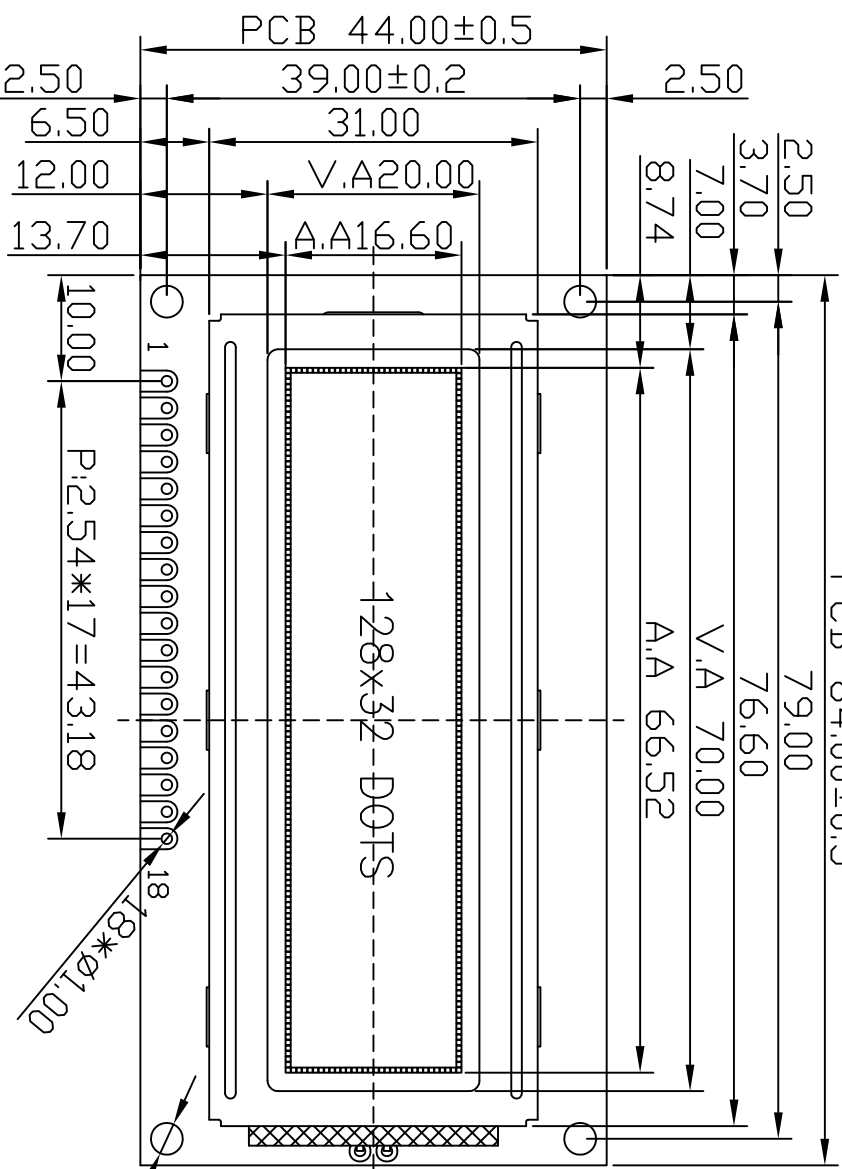


DOT SIZE:

NO	Symbol
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	PSB
16	RST
17	LEDA
18	LEDC

NOTES:

- LCD TYPE: STN-Blue, Negative Transmissive
- OPERATING VOLTAGE: VDD=5.0V, Vop=4.80V
- VIEWING DIRECTION: 6 O'CLOCK
- DRIVE METHOD: 1/32 Duty, 1/6 Bias
- OPERATING TEMP: -20°C TO +70°C
- STORAGE TEMP: -30°C TO +80°C
- CONNECTOR TAPE: Zebra
- DRIVER IC: AIP31020 or Equivalent
- BACKLIGHT: White
- ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.



SINDA DISPLAY TECHNOLOGY CO., LTD.

SHEET: 1 of 1		VERSION: 1.0		UNITS: MM	
APPROVALS	DATE	GENERAL TOL: ± 0.2		DO NOT SCALE THIS DRAWING.	
DWN	Mike	2013-07-10		SCALE: 1:1	
CHK					
APP	CJ	2013-07-10			
MODEL NUMBER: SDGB12832-02		www.sindadisplay.com			