
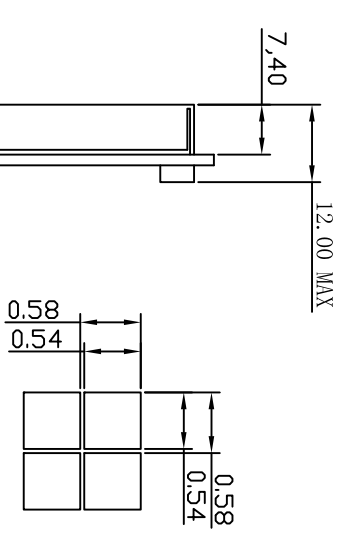


REV:	DESCRIPTION	BY	DATE
V1.0	New Issue	Mike	2013-09-16

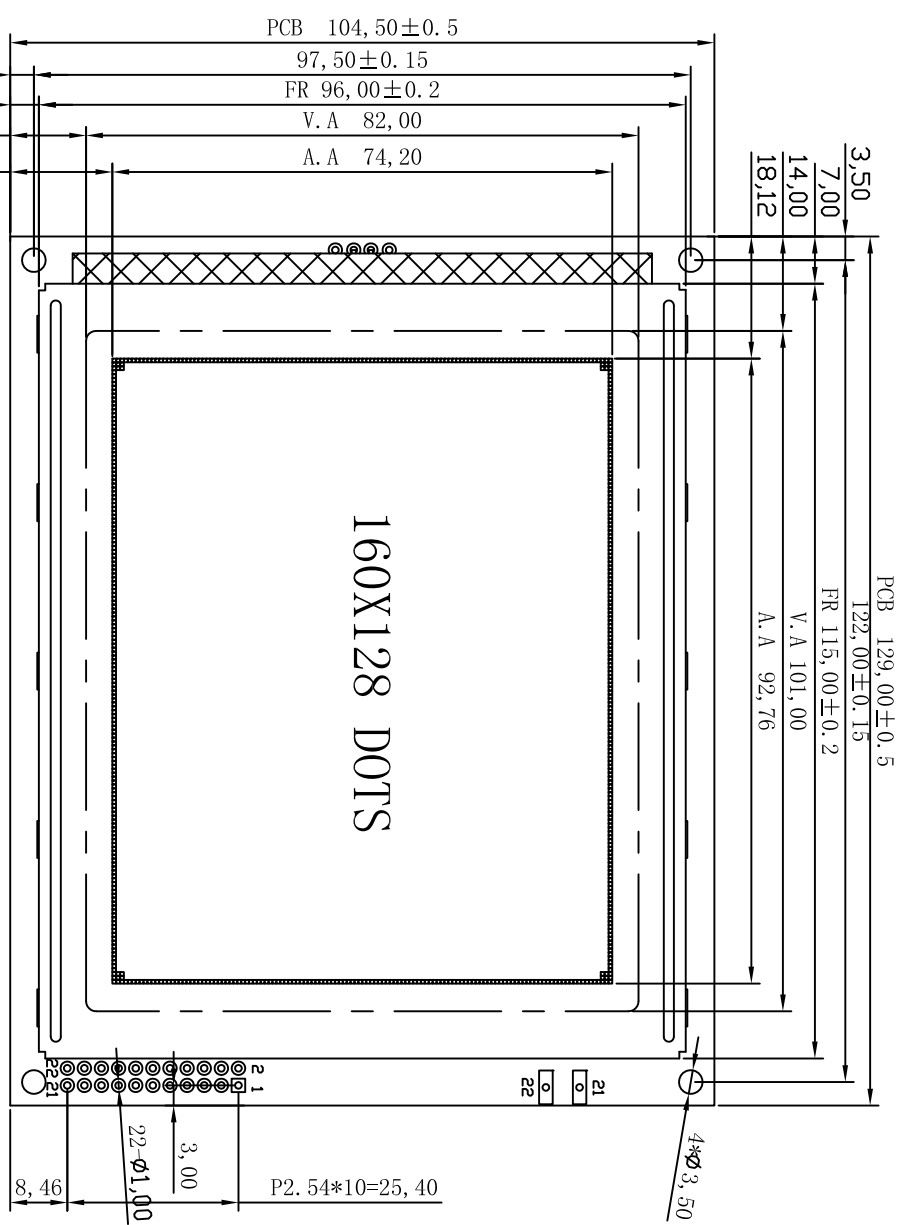


160X128 DOTS

NOTES :

1. LCD TYPE: STN Yellow-Green, Positive Transflective
2. OPERATING VOLTAGE: VDD=5.0V, Vop=16.0V
3. VIEWING DIRECTION: 6 O'CLOCK
4. DRIVE METHOD: 1/128 Duty, 1/12 Bias
5. OPERATING TEMP: -20°C TO +70°C
6. STORAGE TEMP: -30°C TO +80°C
7. CONNECTOR TAPE: Zebra
8. DRIVER IC: SAPI024B or Equivalent
9. BACKLIGHT: Yellow-Green
10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

NO	Symbol
1	FG
2	VSS
3	VDD(5.0V)
4	V0
5	WR
6	RD
7	CE
8	C/D
9	N.C
10	RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS
20	VEE
21	LEDA(5.0V)
22	LEDC



SINDA DISPLAY TECHNOLOGY CO., LTD.

SHEET: 1 of 1	VERSION: 1.0	UNITS: MM
APPROVALS	GENERAL TOL: ± 0.2	
DWN Mike	DO NOT SCALE THIS DRAWING.	
DATE 2013-09-16		
CHK		
APP CJ	SCALE: 1:1	

MODEL NUMBER : SDGB160128-02
www.sindadisplay.com