

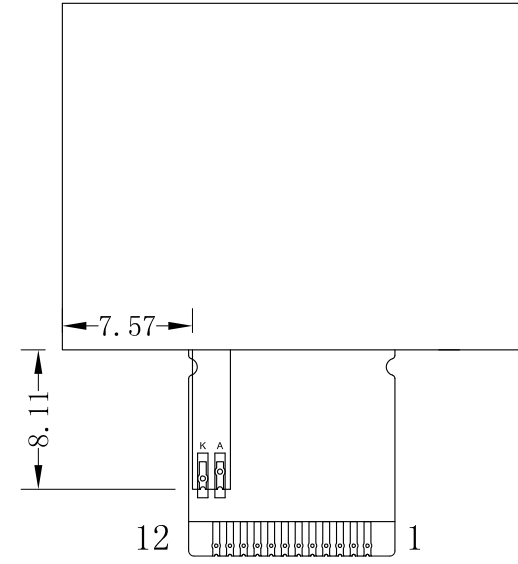
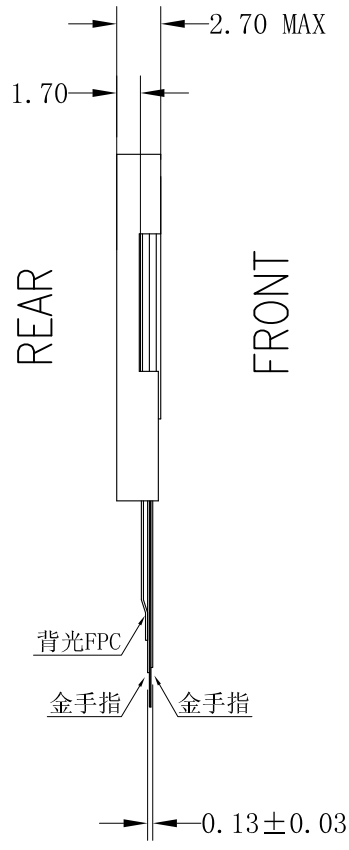



| REV: | DESCRIPTION | BY | DATE |
|------|-------------|-------|------------|
| V1.0 | New issue | SD-02 | 2015-03-29 |
| | | | |
| | | | |

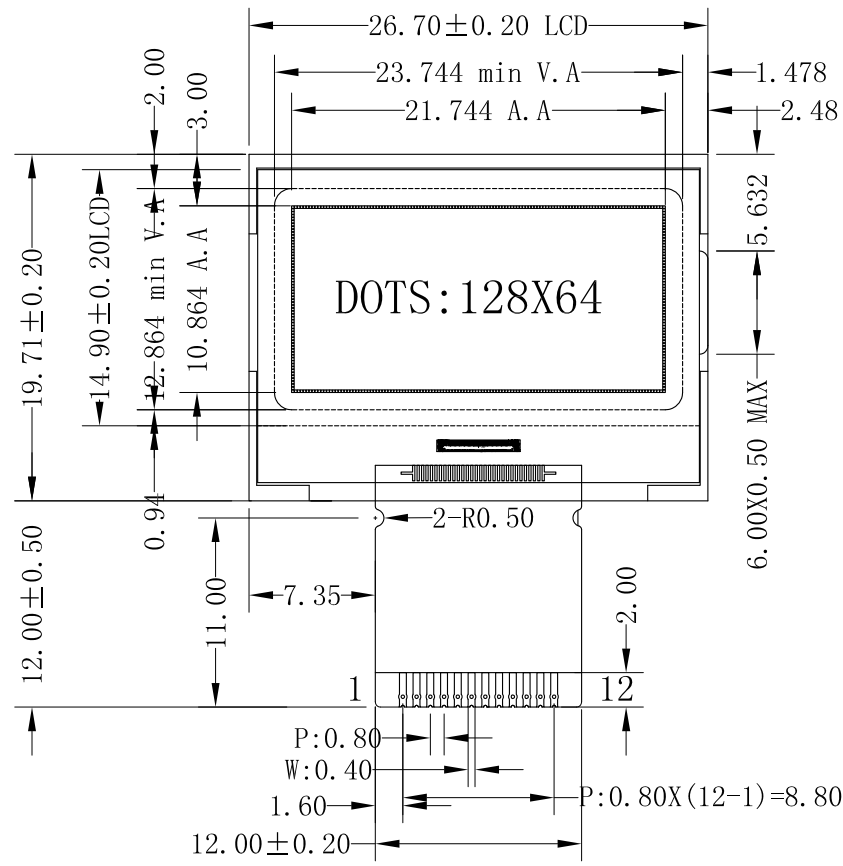

- NOTES :
- LCD TYPE: FSTN Negative Transmissive
 - OPERATING VOLTAGE: $V_{op}=3.0V, V_{LCD}=9.0V$
 - VIEWING DIRECTION: 6 O'CLOCK
 - DRIVE METHOD: 1/64 Duty, 1/9Bias
 - OPERATING TEMP: -20°C TO +70°C
 - STORAGE TEMP: -30°C TO +80°C
 - CONNECTOR TAPE: FPC(COG)
 - DRIVER IC: ST7567
 - BACKLIGHT: White side LED, $V=3.1\pm 0.2v$
 - ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

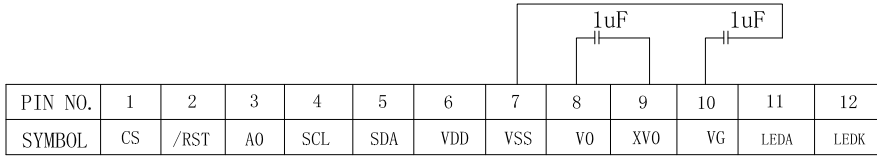

| PIN NO. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
|---------|----|------|----|-----|-----|-----|-----|----|-----|----|------|------|
| SYMBOL | CS | /RST | A0 | SCL | SDA | VDD | VSS | V0 | XV0 | VG | LEDA | LEDK |

| | | | |
|---|------------|---|--|
|  | | SINDA DISPLAY TECHNOLOGY CO., LTD. | |
| SHEET: 1 of 1 | | MODEL NUMBER : SDGG12864-72 | VERSION: 1.0 GENERAL TOL: ± 0.2 DO NOT SCALE THIS DRAWING. |
| APPROVALS | DATE | UNITS: MM | |
| DWN SD-02 | 2015-03-29 | SCALE: 1:1 | |
| CHK | | | |
| APP SD-11 | 2015-03-29 | | |
| www.sindadisplay.com | | | |