
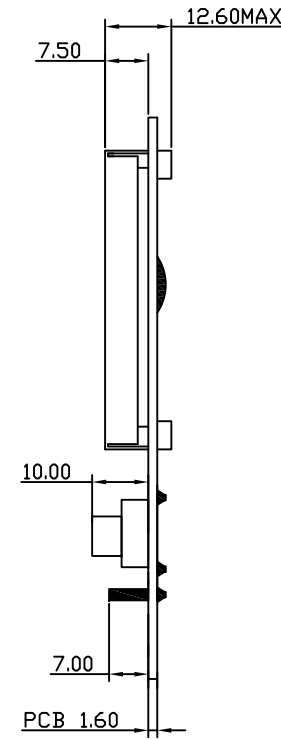



REV:	DESCRIPTION	BY	DATE
V1.0	New issue		2018-06-19
V2.0	Update CN2/3-16,17,18		2019-02-21

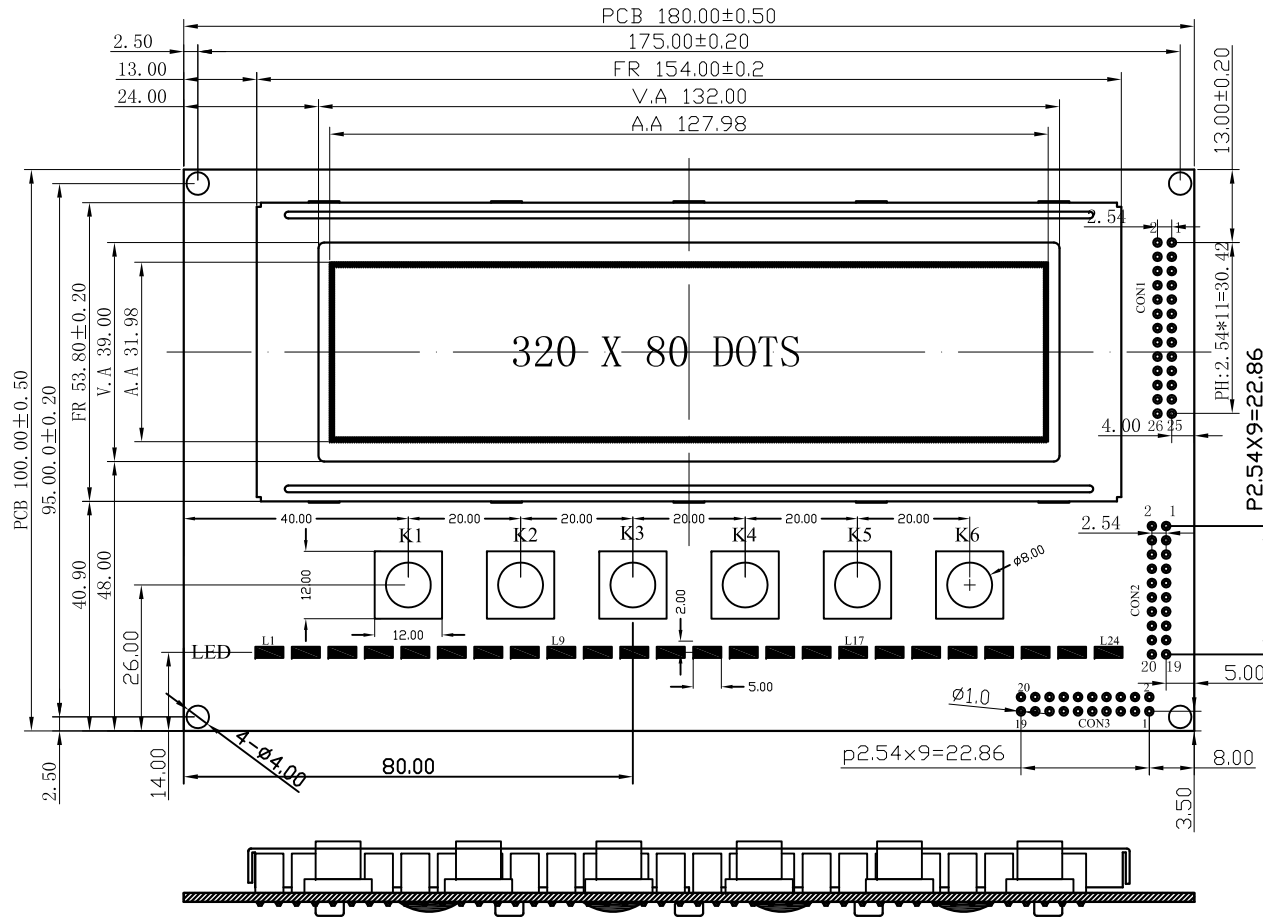

CON1		CON2/CON3	
INTERFACE		INTERFACE	
1	FG	6	/RD
2	VSS	7	/CE
3	VDD(5V)	8	C/D
4	NC	9	M-CS
5	/WR	10	/RST
		11	DB0
		12	DB1
		13	DB2
		14	DB3
		15	DB4
		16	DB5
		17	DB6
		18	DB7
		19	FS
		20	NC
		21	A
		22	RK
		23	GK
		24	BK
		25	M-SI
		26	M-CLK

NOTES :

- LCD TYPE: STN-Blue, Negative Transmissive
- OPERATING VOLTAGE: VDD=5.0V, Vop=12.0V
- VIEWING DIRECTION: 6 O'CLOCK
- DRIVE METHOD: 1/64 Duty, 1/19 Bias
- OPERATING TEMP: -20°C TO +70°C
- STORAGE TEMP: -30°C TO +80°C
- CONNECTOR TAPE: Zebra
- DRIVER IC: RA8835 or Equivalent
- BACKLIGHT: White
- ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

 SINDA DISPLAY TECHNOLOGY CO., LTD.				
SHEET: 1 of 1		MODEL NUMBER : SDGB32080-01	VERSION: 2.0	UNITS: MM
APPROVALS	DATE	GENERAL TOL: ± 0.2		
DWN	SD-03	DO NOT SCALE THIS DRAWING.		
CHK				
APP	SD-11	www.sindadisplay.com		SCALE: 1:1