



INTEERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

VER	DETIAL DISCRIPTION	DATE
00	FIRST ISSUE	2016-10-7
01	Add lower interface	2022-07-05

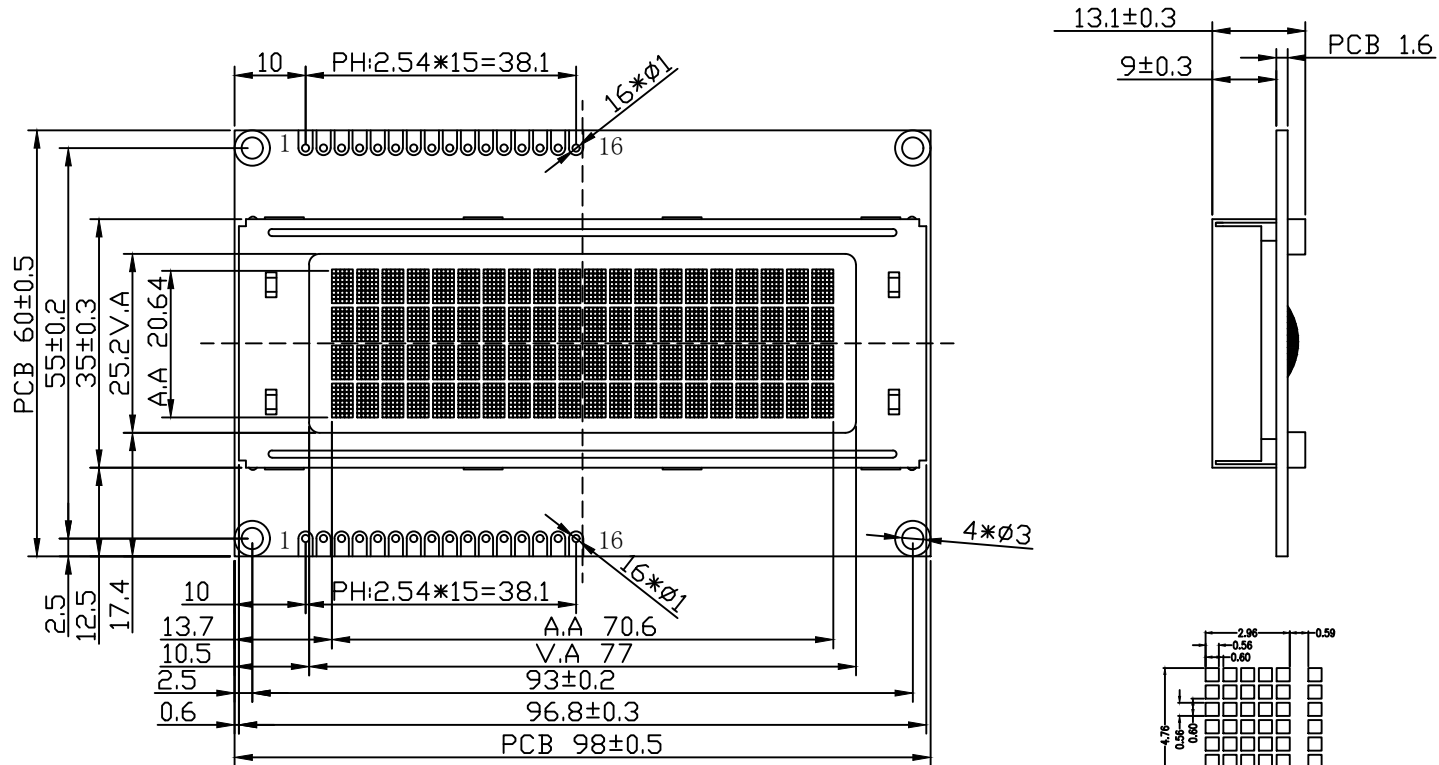

SPECIFICATION:

- 1). STN(Y-G) / POSITIVE / TRANSMISSIVE
- 2). DUTY: 1/16. BIAS: 1/5. VOP=4.2V
- 3). VIEWING ANGLE: 6 O' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: Yellow-Green I=40MA
- 6). DRIVE POWER: VDD=5.0V
- 7). DRIVE IC: AIP31066



SINDA SINDA DISPLAY TECHNOLOGY CO., LTD.

SHEET: 1 of 3		
APPROVALS		DATE
DWN	SD-04	2022-07-05
CHK		
APP	SD-11	2022-07-05

MODEL NUMBER : SDCB2004-01	VERSION: 1.0	UNITS: MM
	GENERAL TOL: ± 0.2	
DO NOT SCALE THIS DRAWING.		

www.sindadisplay.com

SCALE: 1:1

DOT SIZE: