

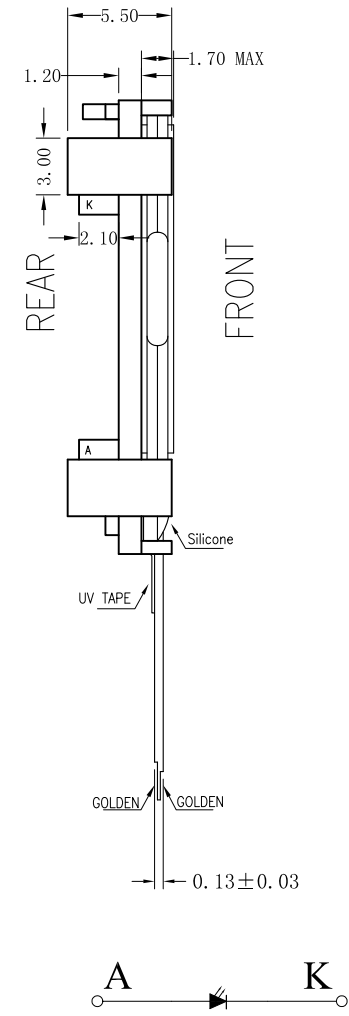


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	2015-02-23

D
C
B
A

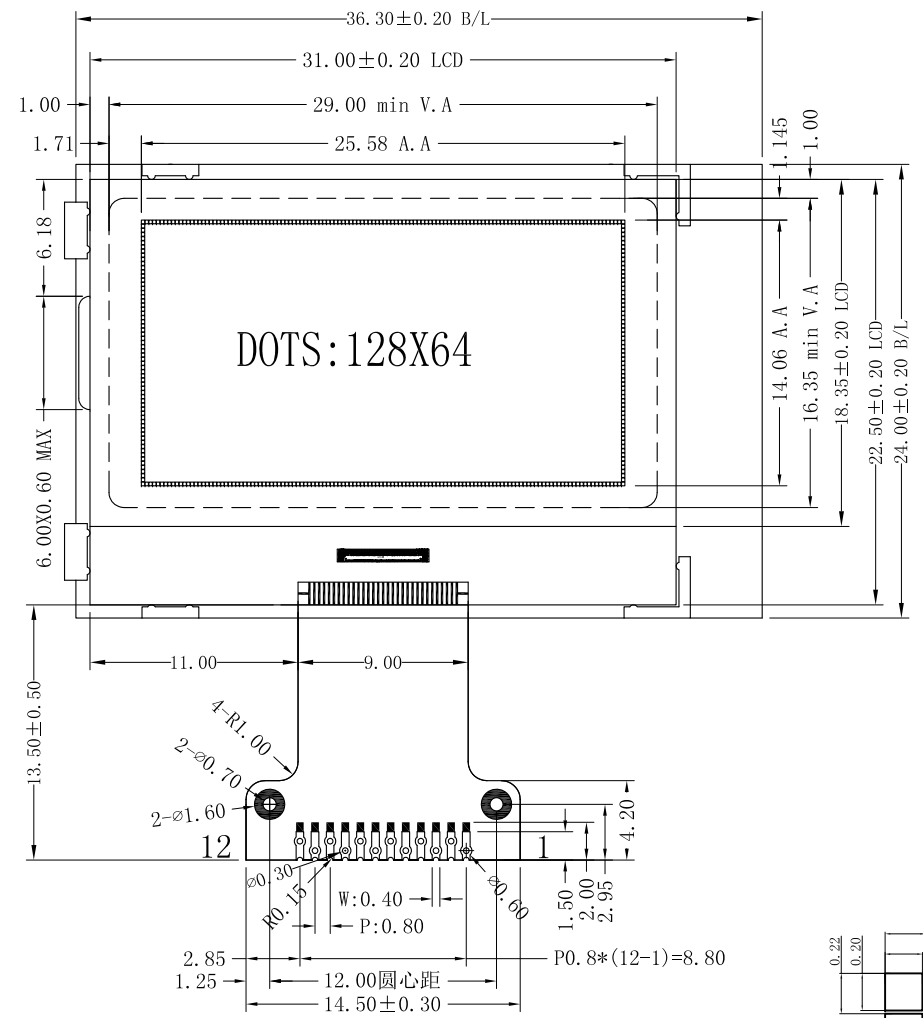

NO	Symbol
1	CSB
2	RST
3	A0
4	SCK
5	SDA
6	VDD
7	VSS
8	V0
9	XV0
10	VG
11	NC
12	NC

- NOTES :
- | | |
|---|---|
| 1. LCD TYPE: | FSTN, Positive Transmissive |
| 2. OPERATING VOLTAGE: | VDD=3.0V, Vop=9.0V |
| 3. VIEWING DIRECTION: | 6 O'CLOCK |
| 4. DRIVE METHOD: | 1/65 Duty, 1/9 Bias |
| 5. OPERATING TEMP: | -10°C TO +60°C |
| 6. STORAGE TEMP: | -20°C TO +70°C |
| 7. CONNECTOR TAPE: | COG+FPC |
| 8. DRIVER IC: | ST7567 |
| 9. BACKLIGHT: | 1 pcs LED White, VF=3.1±0.2V, IF=15mA |
| 10. ALL sub-parts and materials of the parts, | must comply with the RoHS instructions of EU. |

SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1	
APPROVALS	DATE
DWN Mike	2015-02-23
CHK	
APP CJ	2015-02-23
MODEL NUMBER : SDGG12864-67	
VERSION: 1.0	UNITS: MM
GENERAL TOL: ± 0.2	
DO NOT SCALE THIS DRAWING.	
www.sindadisplay.com	
SCALE: 1:1	