



REV:	DESCRIPTION	BY	DATE
V1.0	New issue	XP	2017-05-02
V2.0	Change Viewing direction	XP	2017-05-08
V3.0	Change B/L Resistor	XP	2017-06-22

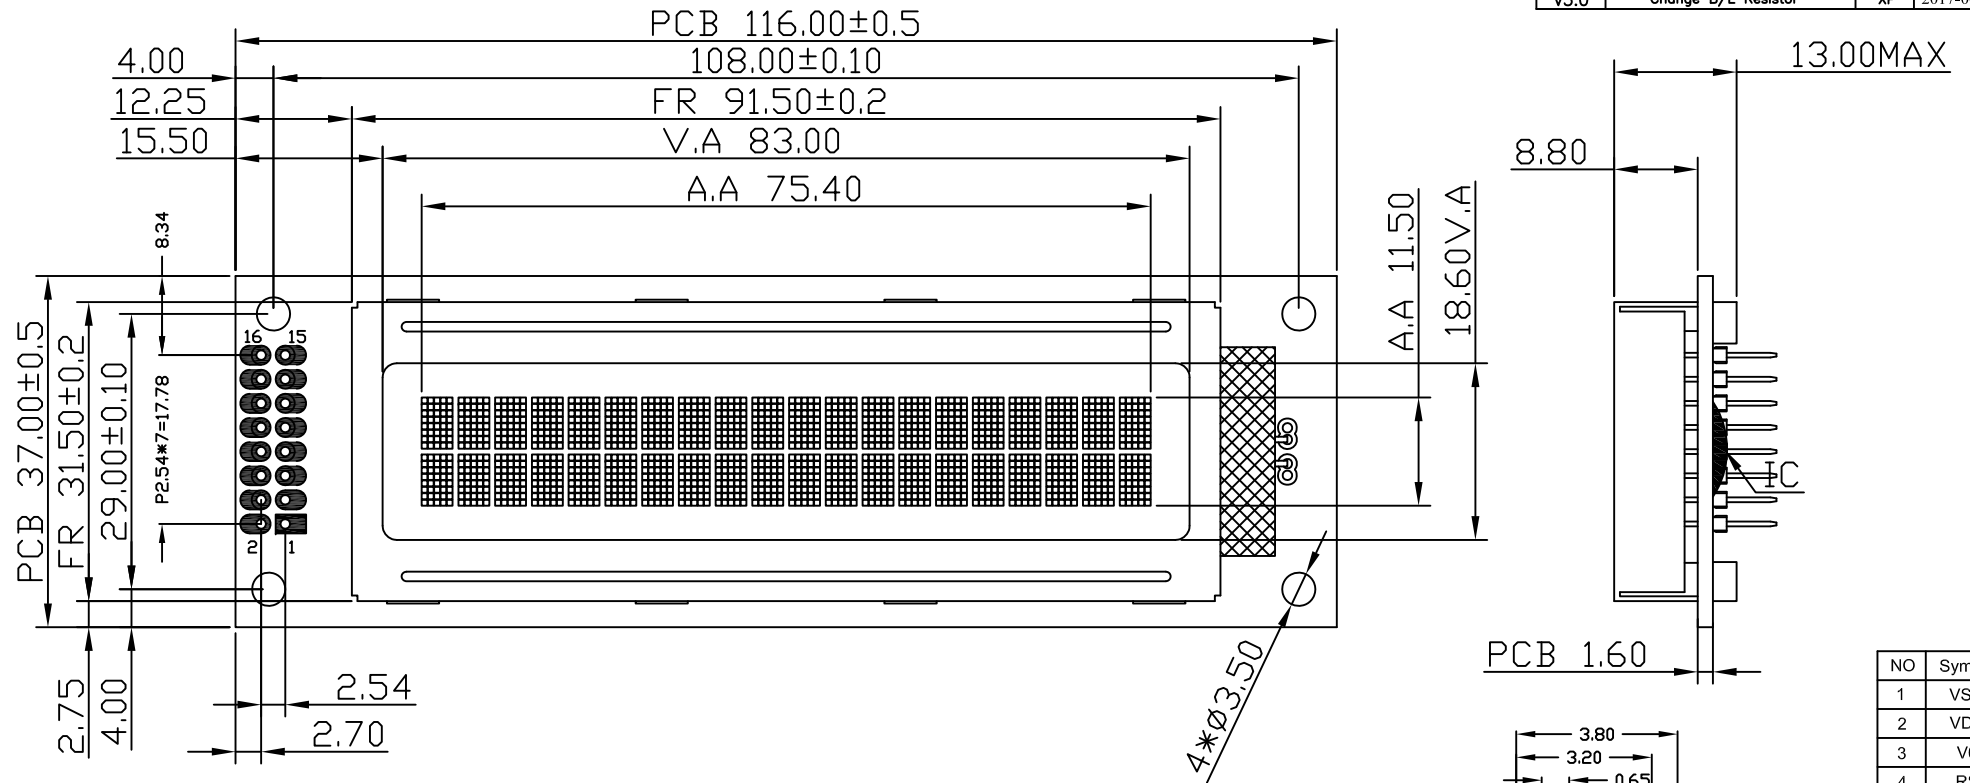

NOTES :

- | | |
|---|--------------------------------------|
| 1. LCD TYPE: | DFSTN Negative Transmissive |
| 2. OPERATING VOLTAGE: | VDD=3.3V, Vop=5.0V |
| 3. VIEWING DIRECTION: | 12 O'CLOCK |
| 4. DRIVE METHOD: | 1/16 Duty, 1/5 Bias |
| 5. OPERATING TEMP: | -20°C TO +70°C |
| 6. STORAGE TEMP: | -30°C TO +80°C |
| 7. CONNECTOR TAPE: | Zebra |
| 8. DRIVER IC: | AIP31066 or Equivalent |
| 9. BACKLIGHT: | 2Pcs LED Green Vf=3.1±0.2V VI=15x2mA |
| 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU. | |
| 11. Remove R12 resistor 100E , Remove R13 resistor 100E and replace with 150E ;
Add Display PCB Serial No. mention | |

NO	Symbol
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

 SINDA DISPLAY TECHNOLOGY CO., LTD.		A	
SHEET: 1 of 1		MODEL NUMBER :	VERSION: 3.0
APPROVALS		DATE	UNITS: MM
DWN	Mike	2017-06-22	GENERAL TOL: ± 0.2
CHK			DO NOT SCALE THIS DRAWING.
APP	CJ	2017-06-22	SCALE: 1:1
www.sindadisplay.com			