

8

7

6

5





4

3

2


1

| REV: | DESCRIPTION | BY | DATE |
|------|-------------|----|------------|
| V1.0 | New issue | | 2014-04-16 |
| | | | |
| | | | |

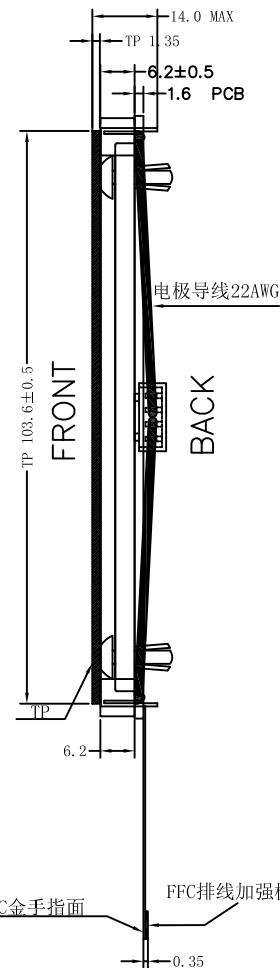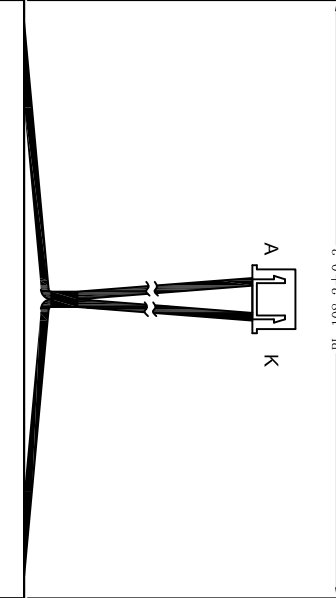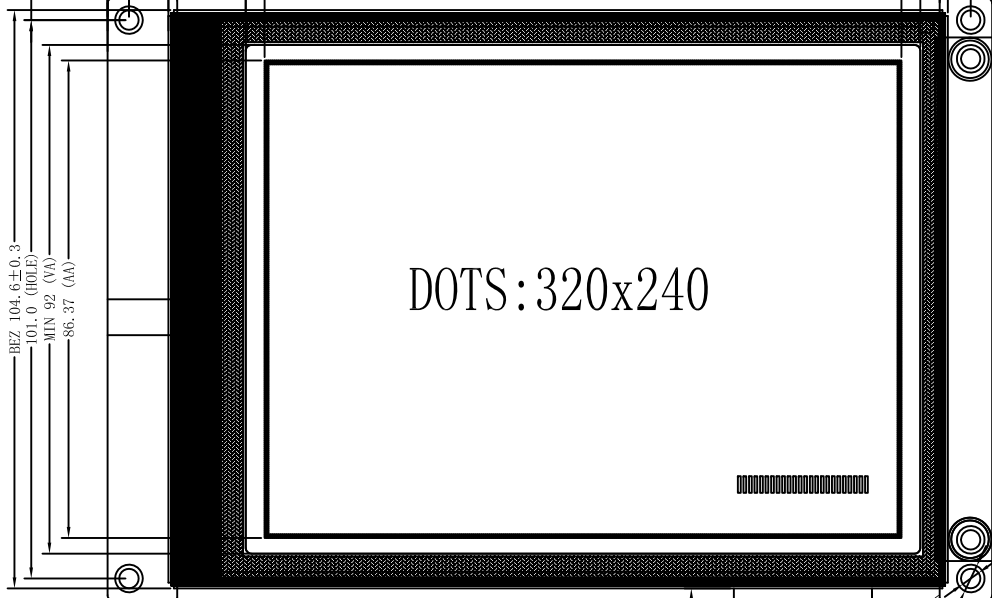


CN1

| Pin No. | Symbol |
|---------|--------|
| 1 | RST |
| 2 | RD |
| 3 | WR |
| 4 | CS |
| 5 | AO(RS) |
| 6 | DB0 |
| 7 | DB1 |
| 8 | DB2 |
| 9 | DB3 |
| 10 | DB4 |
| 11 | DB5 |
| 12 | DB6 |
| 13 | DB7 |
| 14 | VDD |
| 15 | VSS |
| 16 | VDOUT |
| 17 | V0 |
| 18 | DCLK |
| 19 | DDUT |
| 20 | INT |
| 21 | CS-T |
| 22 | DIN |
| 23 | LEDA |
| 24 | LEDK |



NOTES :

- 1. LCD TYPE: FSTN, Positive Transflective
- 2. OPERATING VOLTAGE: VDD=5.0V, Vop=23.0V
- 3. VIEWING DIRECTION: 6 O'CLOCK
- 4. DRIVE METHOD: 1/240Duty, 1/16 Bias
- 5. OPERATING TEMP: -20°C TO +70°C
- 6. STORAGE TEMP: -30°C TO +80°C
- 7. CONNECTOR TAPE: Zebra
- 8. DRIVER IC: RA8835 or Equivalent
- 9. BACKLIGHT: White
- 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.



SINDA DISPLAY TECHNOLOGY CO., LTD.

| | | |
|---------------|------|------------|
| SHEET: 1 of 1 | | |
| APPROVALS | DATE | |
| DWN | LZH | 2014-04-16 |
| CHK | | |
| APP | Mike | 2014-04-16 |

| | | |
|----------------------------|--------------------|------------|
| MODEL NUMBER : | VERSION: 1.0 | UNITS: MM |
| SDGB320240-02 | GENERAL TOL: ± 0.2 | |
| DO NOT SCALE THIS DRAWING. | | |
| www.sindadisplay.com | | SCALE: 1:1 |

8

7

6

5

4

3

2

1

D

D

C

C

B

B

A

A