

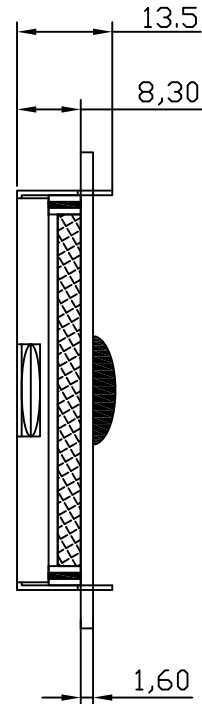


8 7 6 5 4 3 2 1


REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	

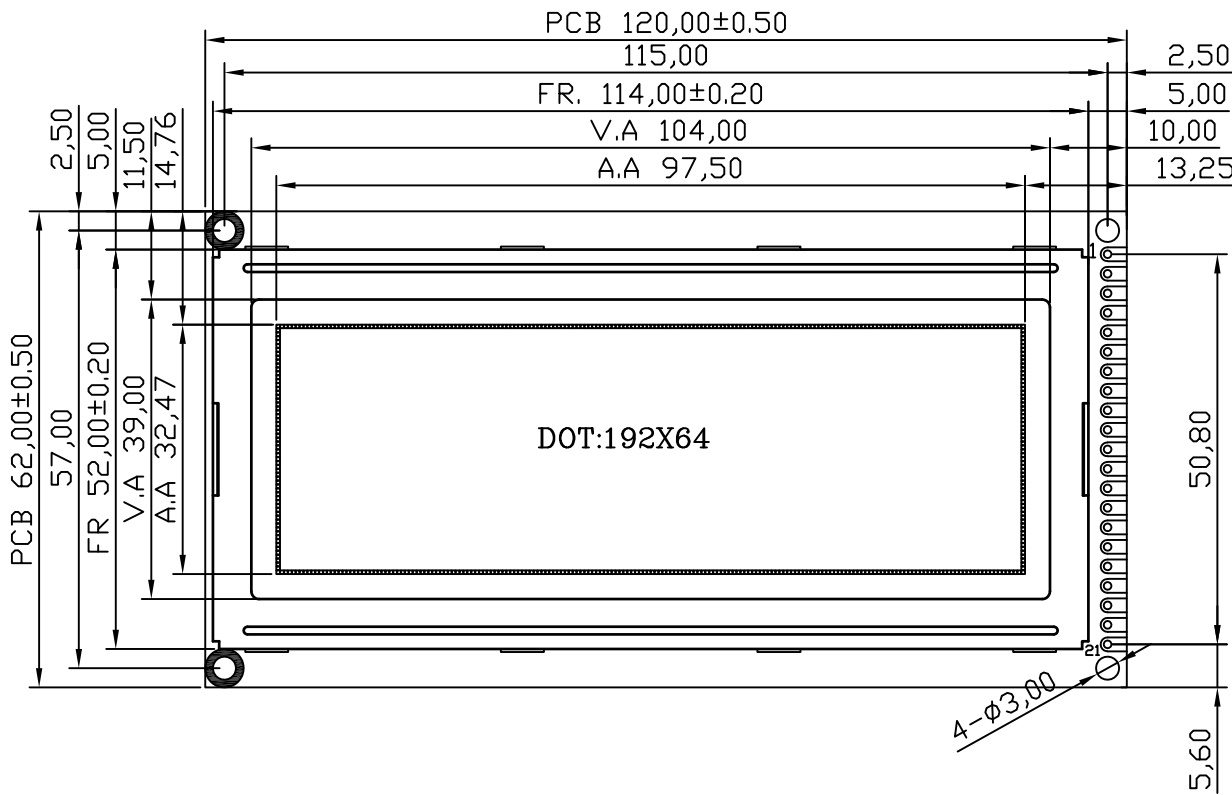

NO.	SYMBOL
1	VSS
2	VDD
3	V0
4	VEE
5	RS
6	R/W
7	E
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	CS1
17	CS2
18	CS3
19	/REST
20	BLA
21	BLK

NOTES :

- 1. LCD TYPE: FSTN Positive Transflective
- 2. OPERATING VOLTAGE: VDD=5.0V, Vop=12.0V
- 3. VIEWING DIRECTION: 6 O'CLOCK
- 4. DRIVE METHOD: 1/64 Duty, 1/9 Bias
- 5. OPERATING TEMP: -20°C TO +70°C
- 6. STORAGE TEMP: -30°C TO +80°C
- 7. CONNECTOR TAPE: Zebra
- 8. DRIVER IC: AIP31107 or Equivalent
- 9. BACKLIGHT: White
- 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.



SINDA SINDA DISPLAY TECHNOLOGY CO., LTD.

SHEET: 1 of 1		
APPROVALS		DATE
DWN	Mike	2013-10-16
CHK		
APP	CJ	2013-10-16

MODEL NUMBER : SDGB19264-03	VERSION: 1.0	UNITS: MM
	GENERAL TOL: ± 0.2	
www.sindadisplay.com		SCALE: 1:1

8 7 6 5 4 3 2 1