

8

7

6

5


4

3



2

1

REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	2014-12-04

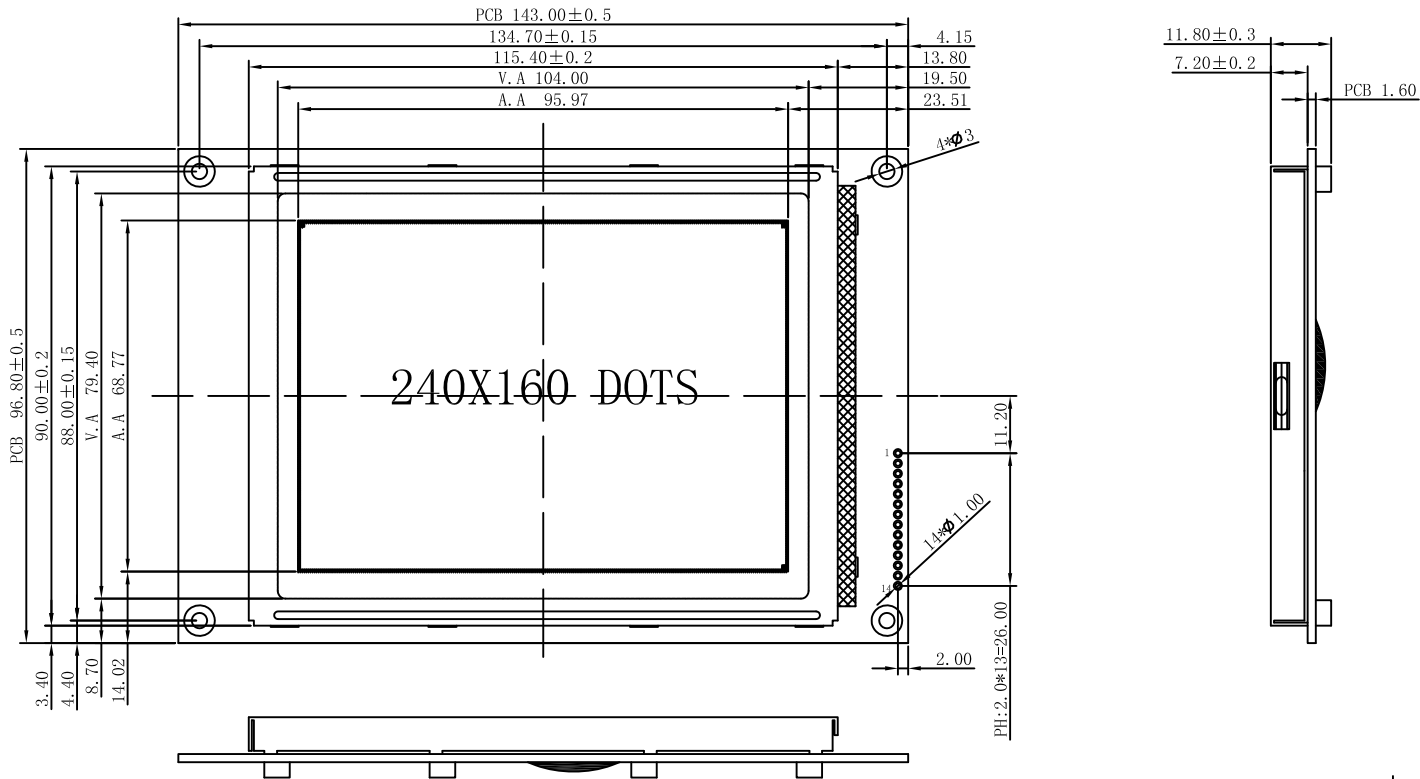

INTERFACE:	
1	FLM
2	M
3	CL1
4	CL2
5	DOFF
6	DB0
7	DB1
8	DB2
9	DB3
10	VDD
11	VSS
12	VEE
13	VO
14	FGND

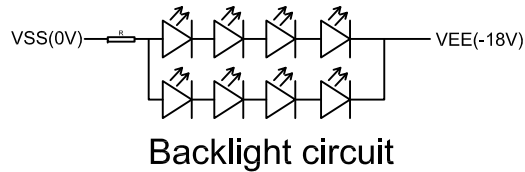

NOTES :

- 1. LCD TYPE: STN-Blue, Negative Transmissive
- 2. OPERATING VOLTAGE: VDD=5.0V, Vop=17.5V
- 3. VIEWING DIRECTION: 6 O'CLOCK
- 4. DRIVE METHOD: 1/160 Duty, 1/12 Bias
- 5. OPERATING TEMP: -20°C TO +70°C
- 6. STORAGE TEMP: -30°C TO +80°C
- 7. CONNECTOR TAPE: Zebra
- 8. DRIVER IC: Without
- 9. BACKLIGHT: White(LED)
- 10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

		<b>SINDA DISPLAY TECHNOLOGY CO., LTD.</b>	
SHEET: 1 of 1		MODEL NUMBER : SDGB240160-01A	VERSION: 1.0
APPROVALS	DATE	GENERAL TOL: ± 0.2	
DWN Mike	2014-12-04	DO NOT SCALE THIS DRAWING.	
CHK		www.sindadisplay.com	
APP CJ	2014-12-04	SCALE: 1:1	

8

7

6

5

4

3

2

1