
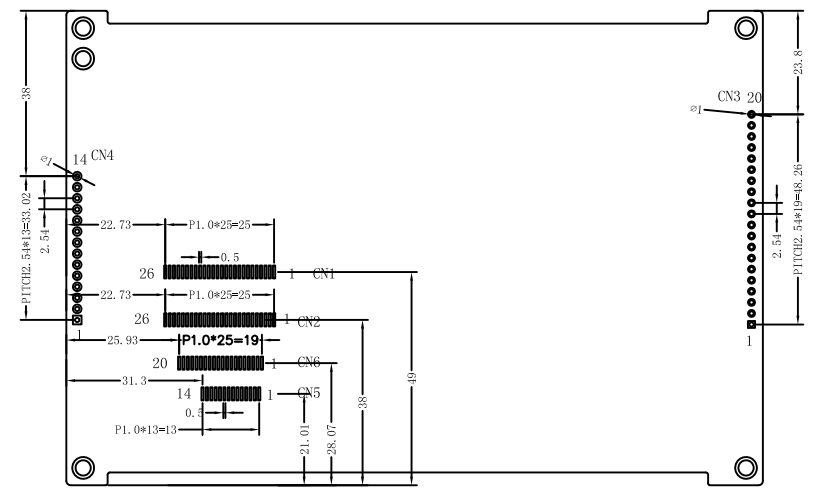
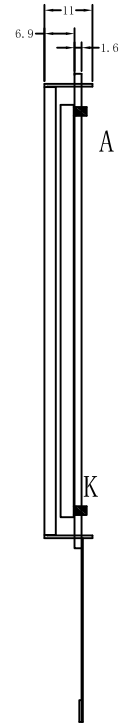


REV:	DESCRIPTION	BY	DATE
V1.0	New issue		2016-10-20

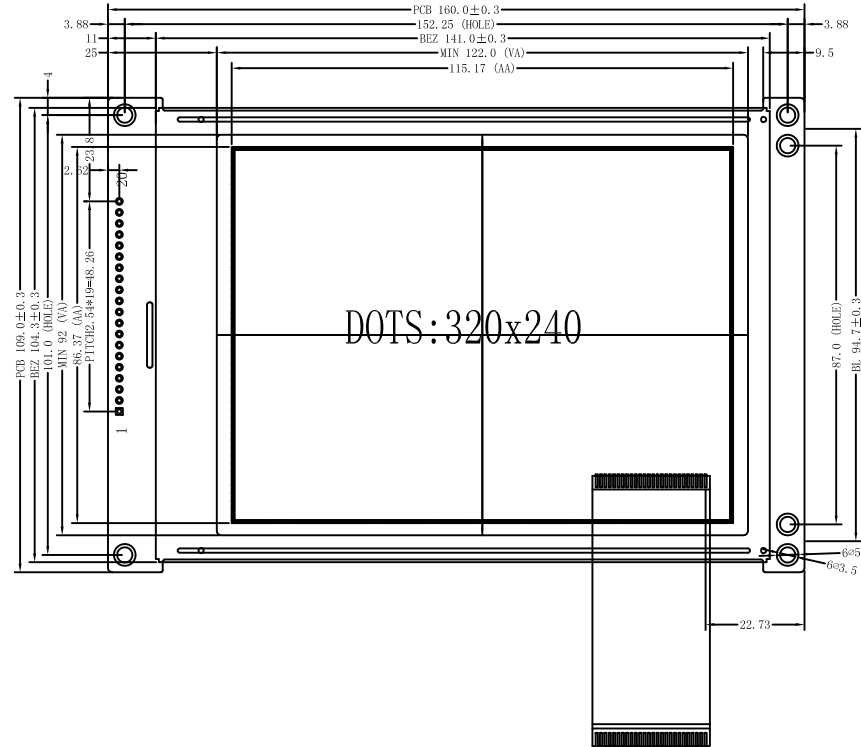

CN4		CN5		CN3		CN6		CN1		CN2	
Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol	Pin No.	Symbol
1	DB0	1	DB0	1	VSS	1	VSS	1	RST	1	VSS
2	DB1	2	DB1	2	VDD	2	DB1	2	RD	2	VDD
3	DB2	3	DB2	3	V0	3	V0	3	WR	3	V0
4	DB3	4	DB3	4	/RV	4	/RV	4	CS	4	ADDRS
5	DIS	5	DIS	5	/RD	5	/RD	5	ADDRS	5	/RV
6	FLM	6	FLM	6	/CS	6	/CS	6	DB0	6	/RD
7	M	7	N	7	ADDRS	7	ADDRS	7	DB1	7	DB0
8	LP	8	LP	8	RST	8	RST	8	DB2	8	DB1
9	CP	9	CP	9	DB0	9	DB0	9	DB3	9	DB2
10	VDD	10	VDD	10	DB1	10	DB1	10	DB4	10	DB3
11	VSS	11	VSS	11	DB2	11	DB2	11	DB5	11	DB4
12	VOUT	12	VOUT	12	DB3	12	DB3	12	DB6	12	DB5
13	V0	13	V0	13	DB4	13	DB4	13	DB7	13	DB6
14	FG	14	FG	14	DB5	14	DB5	14	VDD	14	DB7
				15	DB6	15	DB6	15	VSS	15	/CS
				16	DB7	16	DB7	16	VOUT	16	RST
				17	NC	17	NC	17	V0	17	VOUT
				18	VOUT	18	VOUT	18	DCLK	18	SEL1
				19	LEDA	19	LEDA	19	DOUT	19	DCLK
				20	LEBK	20	LEBK	20	INT	20	CS-T
								21	CS-T	21	DM
								22	DM	22	DOUT
								23	LEDA	23	PEN
								24	LEBK	24	BUSY
								25	DM3	25	DM3
								26	DM4	26	DM4

- NOTES :
- LCD TYPE: STN-Blue, Negative Transmissive
  - OPERATING VOLTAGE: VDD=5.0V, Vop=23.0V
  - VIEWING DIRECTION: 6 O'CLOCK
  - DRIVE METHOD: 1/240Duty, 1/17 Bias
  - OPERATING TEMP: -20°C TO +70°C
  - STORAGE TEMP: -30°C TO +80°C
  - CONNECTOR TAPE: Zebra
  - DRIVER IC: RA8835 or Equivalent
  - BACKLIGHT: White
  - ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

**SINDA DISPLAY TECHNOLOGY CO., LTD.**

SHEET: 1 of 1		MODEL NUMBER : SDGB320240F	VERSION: 1.0	UNITS: MM
APPROVALS	DATE	DO NOT SCALE THIS DRAWING.		
DWN	LZH		2016-10-20	
CHK				
APP	Mike	2016-10-20		SCALE: 1:1

www.sindadisplay.com