



REV:	DESCRIPTION	BY	DATE
V1.0	New Issue	XP	2013-09-16

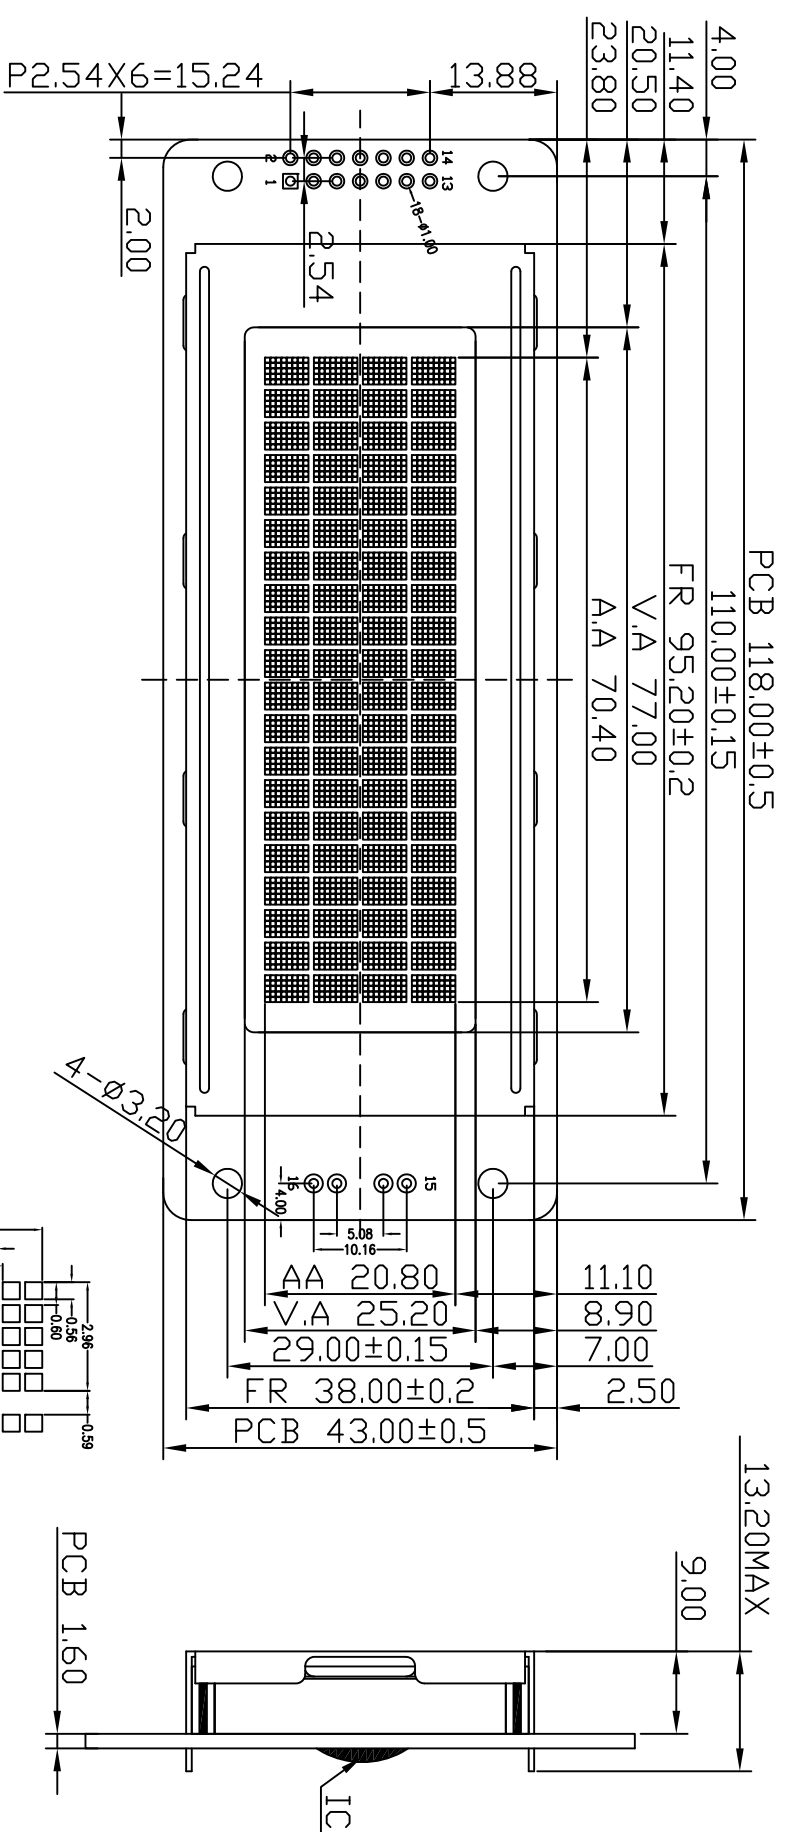

NOTES :

1. LCD TYPE: STN-Blue, Negative Transmissive
2. OPERATING VOLTAGE: VDD=5.0V, Vop=4.5V
3. VIEWING DIRECTION: 6 O'CLOCK
4. DRIVE METHOD: 1/16 Duty, 1/5 Bias
5. OPERATING TEMP: -20°C TO +70°C
6. STORAGE TEMP: -30°C TO +80°C
7. CONNECTOR TAPE: Zebra
8. DRIVER IC: AIP31066 or Equivalent
9. BACKLIGHT: White
10. ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.

DOT SIZE:



NO	Symbol
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K

		SHEET: 1 of 1	
		APPROVALS	DATE
DWN	XP	2013-09-16	
CHK			
APP	CJ	2013-09-16	
		MODEL NUMBER :	VERSION: 1.0
www.sindadisplay.com		SDCB2004-03A	GENERAL TOL: ± 0.2
		DO NOT SCALE THIS DRAWING.	UNITS: MM
		SCALE: 1:1	