REV:	DESCRIPTION	BY	DATE
V1.0	New issue	Mike	

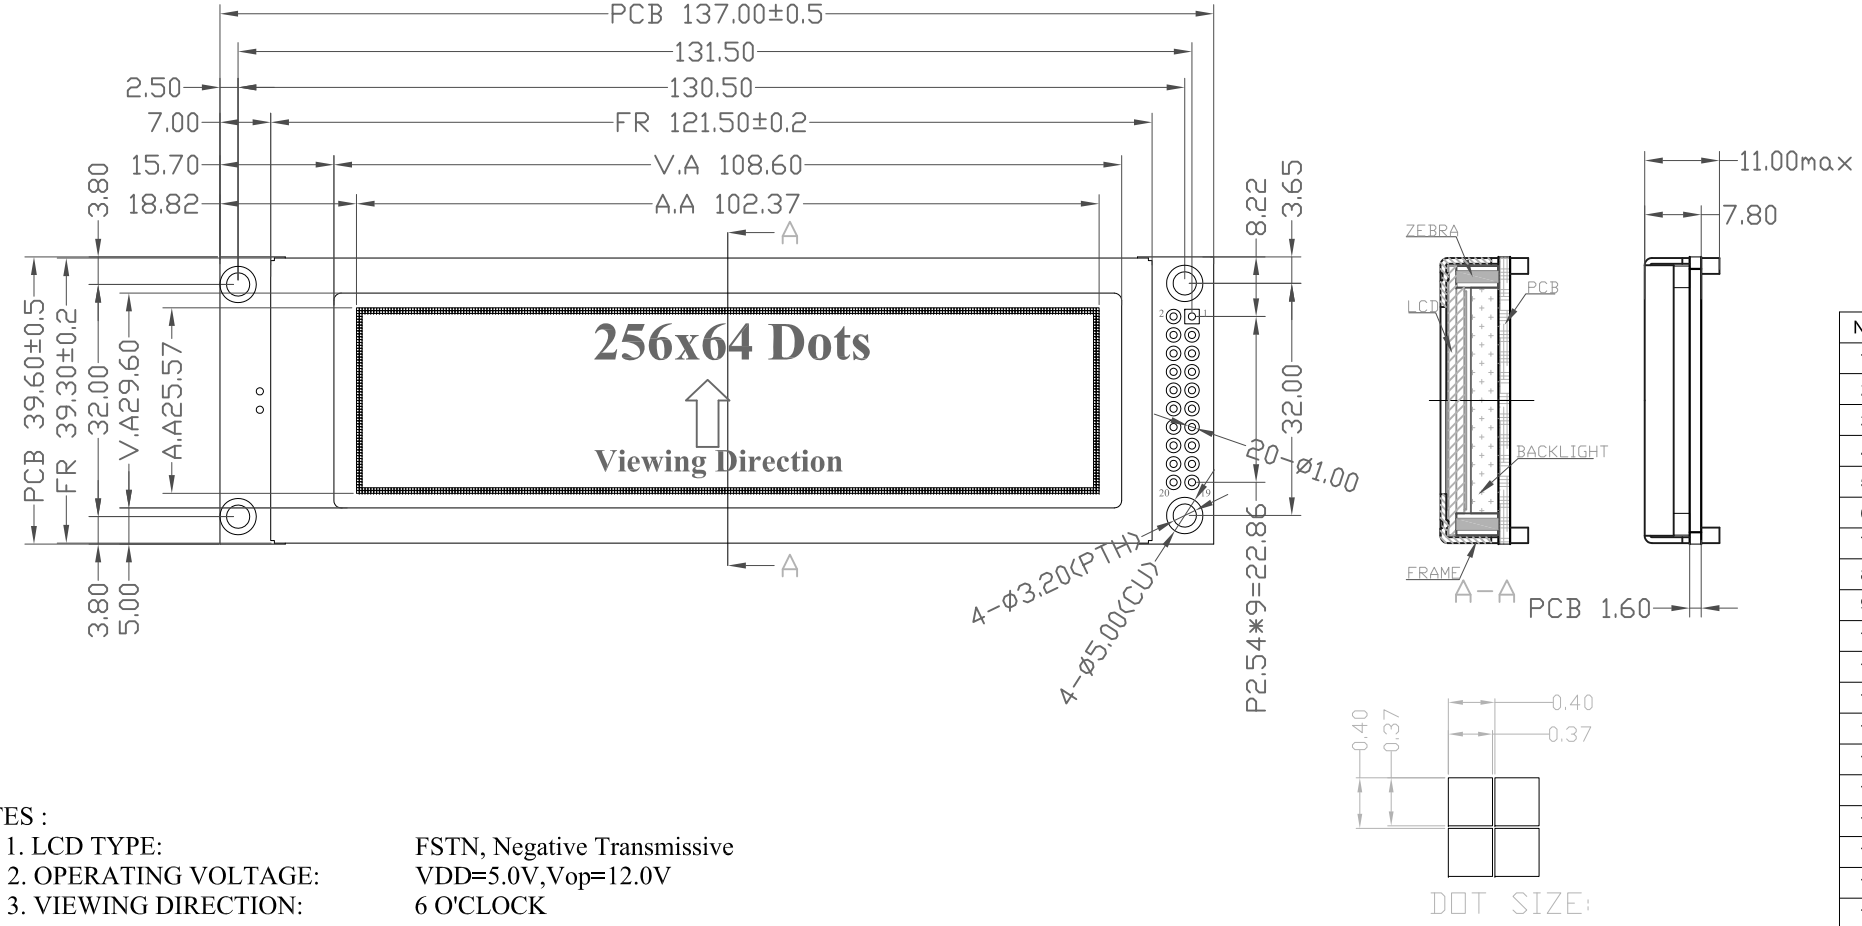

NO	Symbol
1	VSS
2	VDD
3	V0
4	VOUT
5	RS
6	RW
7	E
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	CSA
17	CSB
18	CSC
19	RST
20	LEDA

NOTES :

1. LCD TYPE: FSTN, Negative Transmissive
2. OPERATING VOLTAGE: VDD=5.0V,Vop=12.0V
3. VIEWING DIRECTION: 6 O'CLOCK
4. DRIVE METHOD: 1/64 Duty,1/9 Bias
5. OPERATING TEMP: -20°C TO +70°C
6. STORAGE TEMP: -30°C TO +80°C
7. CONNECTOR TAPE: Zebra
8. DRIVER IC: SBN0064+SBN6400 or Equivalent
9. BACKLIGHT: Green
10. ALL sub-parts and materials of the parts,must comply with the RoHS instructions of EU.

SHEET: 1 of 1

APPROVALS		DATE
DWN	Mike	2016-11-16
CHK		
APP	CJ	2013-11-16

SINDA DISPLAY TECHNOLOGY CO., LTD.

MODEL NUMBER : SDGB25664-01

VERSION: 1.0

GENERAL TOL:± 0.2

DO NOT SCALE THIS DRAWING.

UNITS: MM

www.sindadisplay.com

SCALE: 1:1