REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-02	2017-06-14

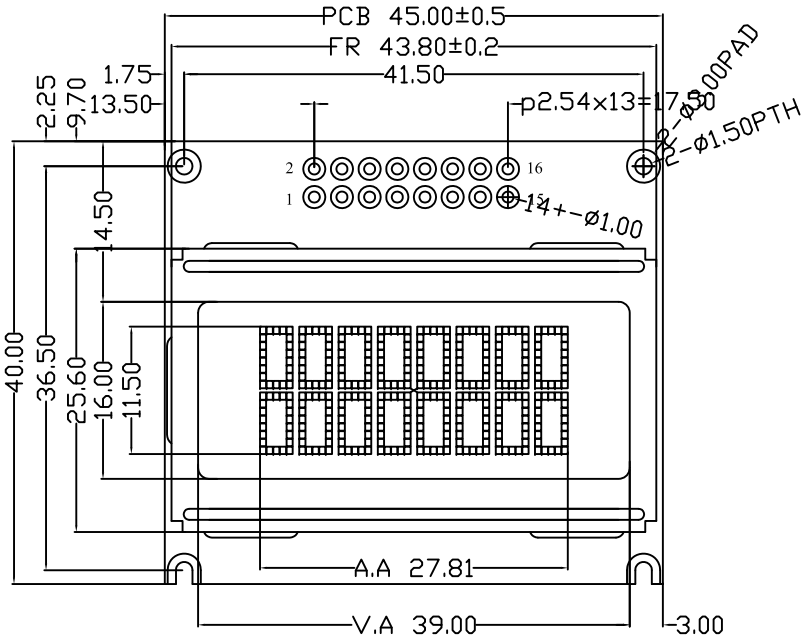

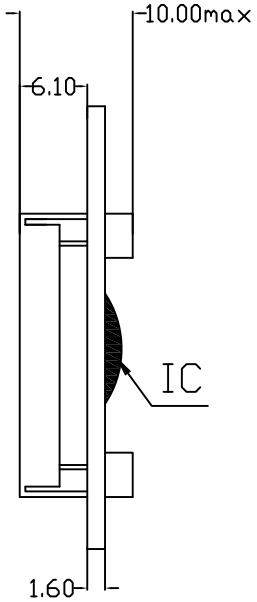

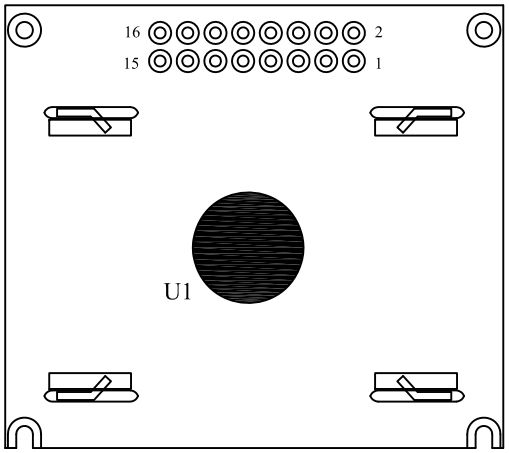



NO	Symbol
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A(5.0V)
16	K

NOTES :

1. LCD TYPE: STN,Y-G Positive Transmissive
2. OPERATING VOLTAGE: VDD=5.0V,Vop=4.70V
3. VIEWING DIRECTION: 6 O'CLOCK
4. DRIVE METHOD: 1/16 Duty,1/5 Bias
5. OPERATING TEMP: -20°C TO +70°C
6. STORAGE TEMP: -30°C TO +80°C
7. CONNECTOR TAPE: Zebra
8. DRIVER IC: AIP31066 or Equivalent
9. BACKLIGHT: 1PCS LED Yollew-Green VI=15mA
10. ALL sub-parts and materials of the parts,must comply with the RoHS instructions of EU.

SHEET: 1 of 1

APPROVALS		DATE
DWN	SD-02	2017-06-14
CHK		
APP	SD-11	2017-06-14

SINDA DISPLAY TECHNOLOGY CO., LTD.

MODEL NUMBER : SDCB0802-03

VERSION: 1.0

GENERAL TOL:± 0.2

UNITS: MM

DO NOT SCALE THIS DRAWING.

www.sindadisplay.com

SCALE: 1:1