



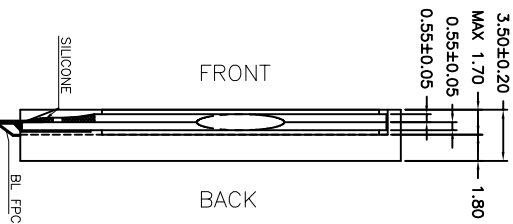



REV.	DESCRIPTION	REVISER	DATE
A0	新出图	seven	2015.12.18

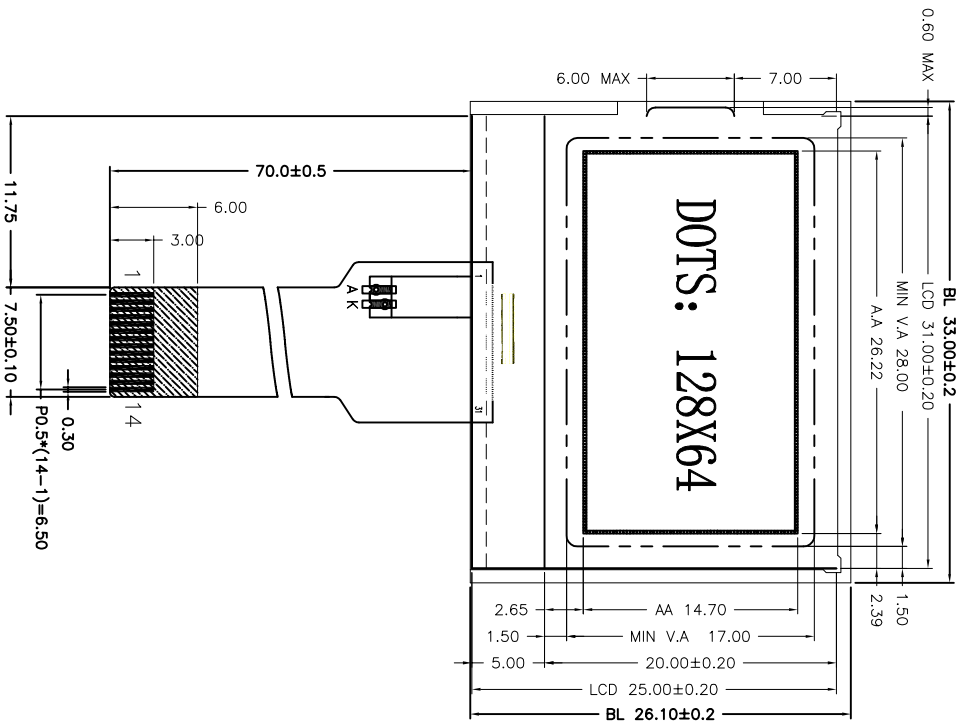

BACKLIGHT CIRCUIT  
2PCS WHITE LEDS  
IF=30mA, VF=3.0±0.1V




DOTS SIDE  
SCALE 20:1



COM & SEG LAYOUT

PIN	DESC
1	A
2	K
3	VLCD
4	VB1+
5	VB1-
6	VB0-
7	VB0+
8	VSS
9	VDD
10	SDA
11	SCK
12	A0
13	RST
14	CS0



- Specifications:
1. Display Mode: FSTN / Transmissive / Positive.
  2. Viewing Angle: 12 0'clock.
  3. Drive Method: 1/64 Duty 1/9 Bias, Vop=8.7, Vdd= 3.0V.
  4. Top: -20°C~+70°C, Tst: -30°C~+80°C.
  5. Connector: COG+FPC.
  6. Drive IC: UC1701X
  7. RoHS Compliant: Yes.

## Sinda Display Technology Co., Ltd.

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODEL NUMBER:	PROJECTION	SHEET:	DATE:
DESIGN BY:	seven		2015.12.18	SDGG12864-26		1 OF 1	2015.12.18
CHECKED BY:							
DO NOT SCALE THIS DRAWING.							