
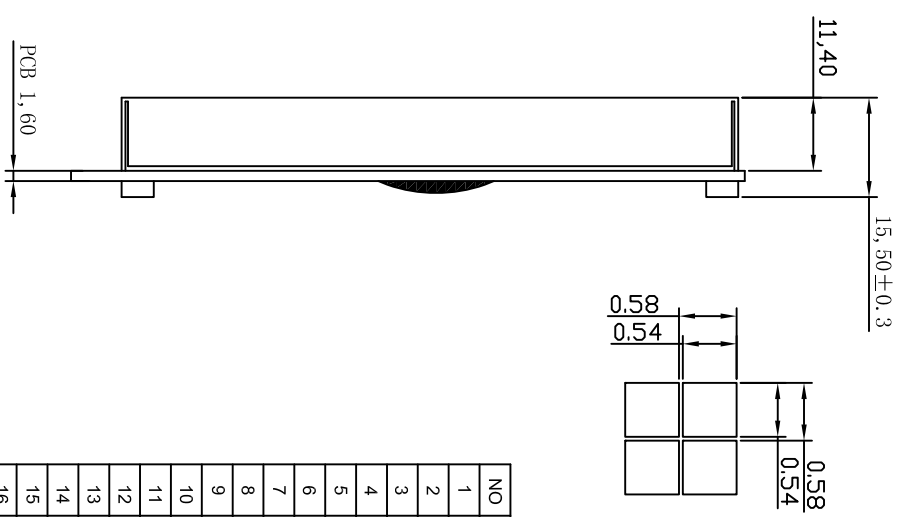



REV:	DESCRIPTION	BY	DATE
V1.0	New Issue	Mike	2013-10-10

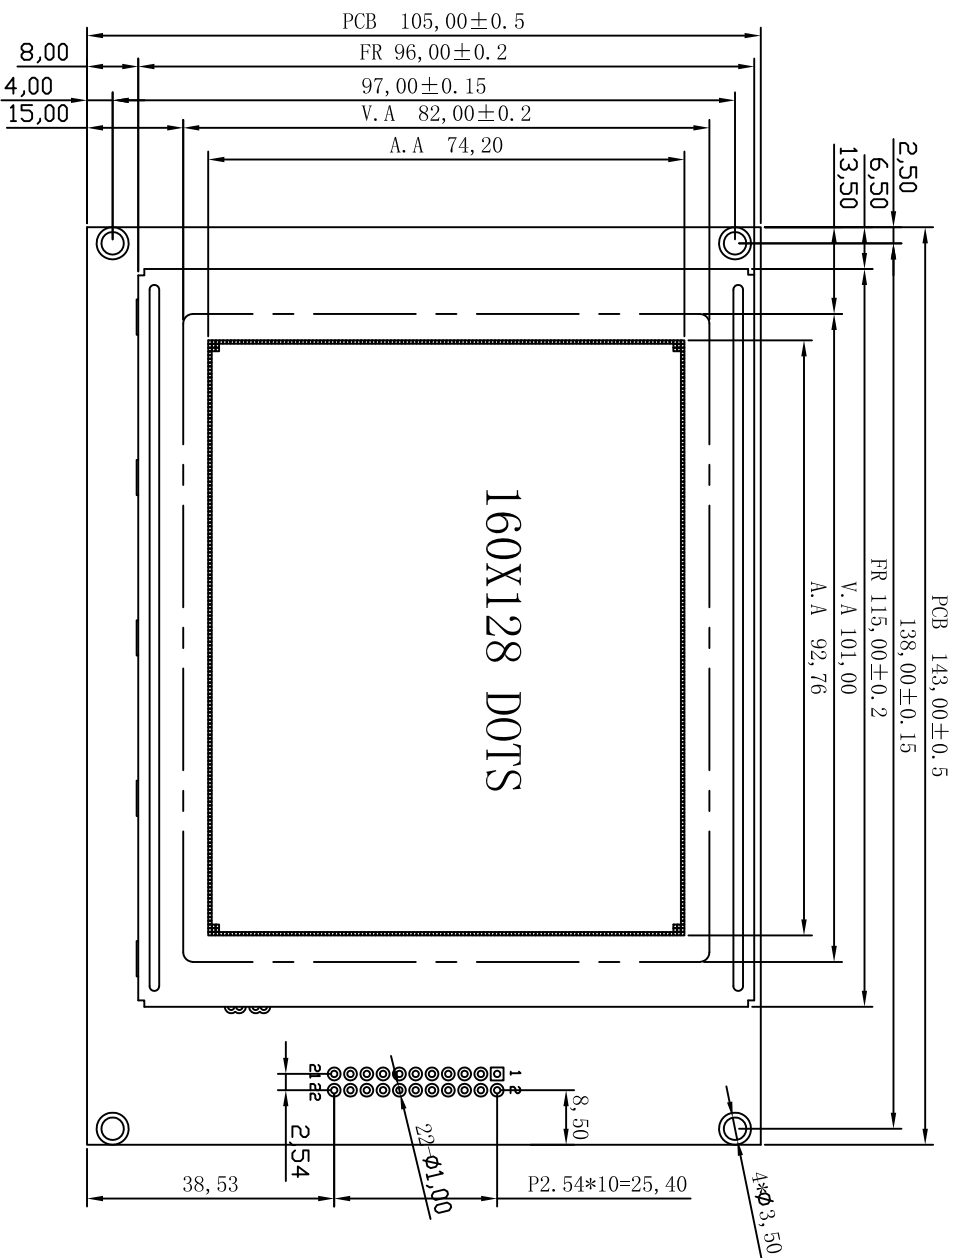

NO	Symbol
1	FG
2	VSS
3	VDD(5.0V)
4	V0
5	VEE
6	WR
7	RD
8	CE
9	C/D
10	/HALT
11	RST
12	DB0
13	DB1
14	DB2
15	DB3
16	DB4
17	DB5
18	DB6
19	DB7
20	VSS
21	LEDA(5.0V)
22	LEDC

NOTES :

- LCD TYPE: STN Yellow-Green, Positive Transflective
- OPERATING VOLTAGE: VDD=5.0V, Vop=16.0V
- VIEWING DIRECTION: 6 O'CLOCK
- DRIVE METHOD: 1/128 Duty, 1/12 Bias
- OPERATING TEMP: -20°C TO +70°C
- STORAGE TEMP: -30°C TO +80°C
- CONNECTOR TAPE: Zebra
- DRIVER IC: RA6963 or Equivalent
- BACKLIGHT: Yellow-Green
- ALL sub-parts and materials of the parts, must comply with the RoHS instructions of EU.



SINDA DISPLAY TECHNOLOGY CO., LTD.

SHEET: 1 of 1	VERSION: 1.0	UNITS: MM
APPROVALS	DATE	GENERAL TOL: ± 0.2
DWN Mike	2013-10-10	DO NOT SCALE THIS DRAWING.
CHK		
APP	CJ	SCALE: 1:1

MODEL NUMBER : SDGB160128-03
www.sindadisplay.com