



REV:	DESCRIPTION	BY	DATE
V1.0	New issue	SD-06	2015-04-25


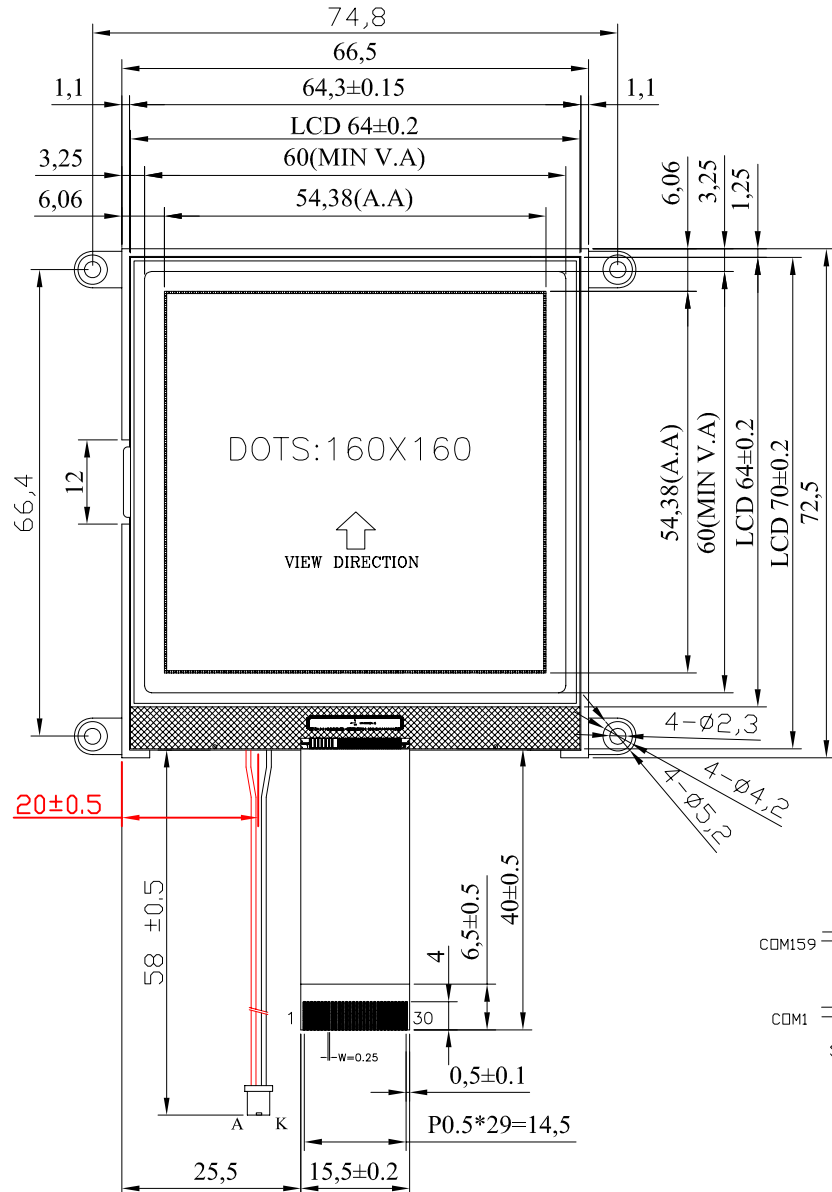


1	NC	16	CS0
2	NC	17	A0
3	VLCD out	18	RD(E)
4	VLCD in	19	WR(R/W)
5	VS+	20	RST
6	VS-	21	D0
7	VB0-	22	D1
8	VB1-	23	D2
9	VB1+	24	D3
10	VB0+	25	D4
11	VDD23	26	D5
12	VDD	27	D6
13	VSS	28	D7
14	BM1	29	NC
15	BMO	30	NC

LED CIRCUIT:



6 pcs 白光燈, 3.0V, 90mA

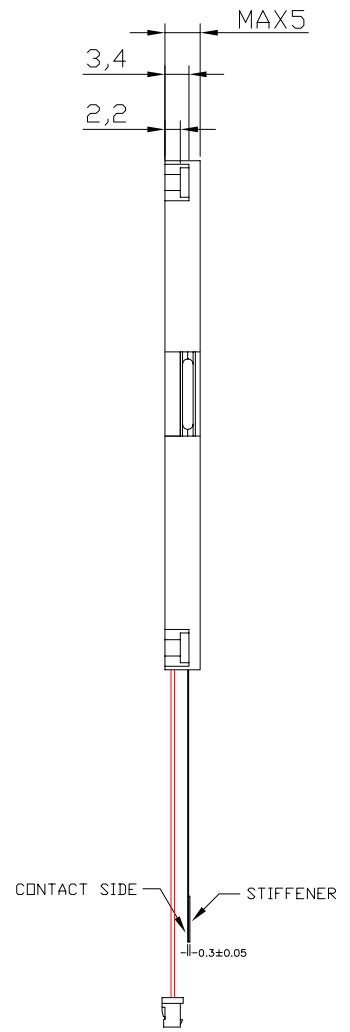

NOTES:

1. DISPLAY TYPE: FSTN/POSITIVE
2. OPERATING VOLTAGE: VDD=3.3V, Vlcd=16.5V
3. OPERATING TEMPERATURE: -20°C~70°C
4. STORAGE TEMPERATURE: -30°C~80°C
5. DRIVE MODE: 1/160D, 1/10B
6. VIEWING DIRECTION: 6:00
7. POLARIZER TYPE: TRANSFLECTIVE
8. CONNECTOR: COG/UC1698U(V1.1)
9. CUSTOMER No.:

		SINDA DISPLAY TECHNOLOGY CO., LTD.	
SHEET: 1 of 1		MODEL NUMBER : SDGG160160-01	VERSION: 1.0
APPROVALS	DATE	UNITS: MM	
DWN	SD-06 2015-04-25	GENERAL TOL: ± 0.2	
CHK		DO NOT SCALE THIS DRAWING.	
APP	SD-11 2015-04-25	SCALE: 1:1	
www.sindadisplay.com			